NOTE:

- ***The parts must be allowed to bond for at least 24 hours before washing the vehicle.***

2.4. Smooth out protective film over the full area and eliminate any air bubbles.

66 78 19 REMOVING AND INSTALLING MIRROR GLASS - AS OF MY 2003 (ALL MODELS)

REMOVING MIRROR GLASS

Removing mirror glass

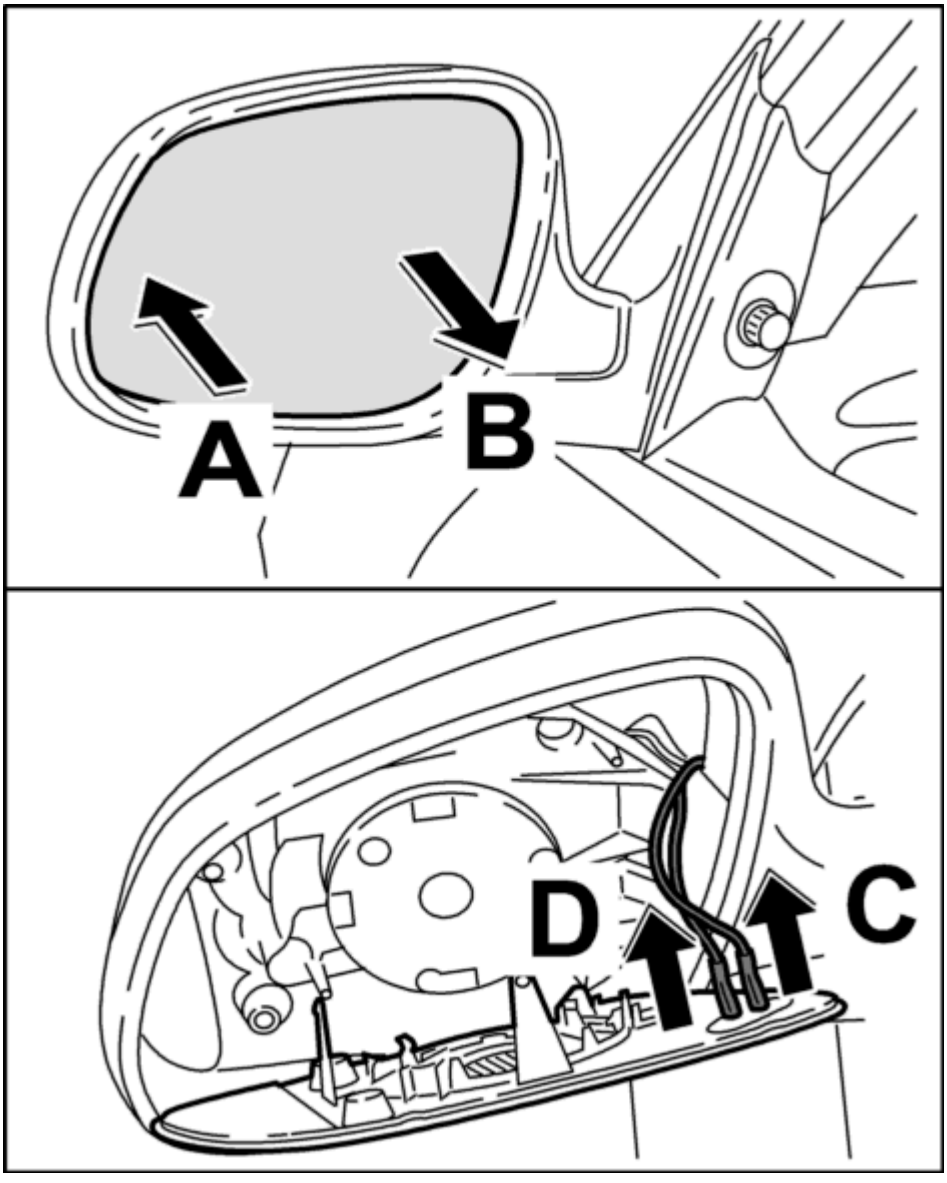

Fig. 290: Removing mirror glass (1 Of 2)

Courtesy of PORSCHE OF NORTH AMERICA, INC.

1. Press glass of mirror on the outside inwards **-arrow A-** and pull out on the inside **-arrow B-** . See **Fig. 290**.

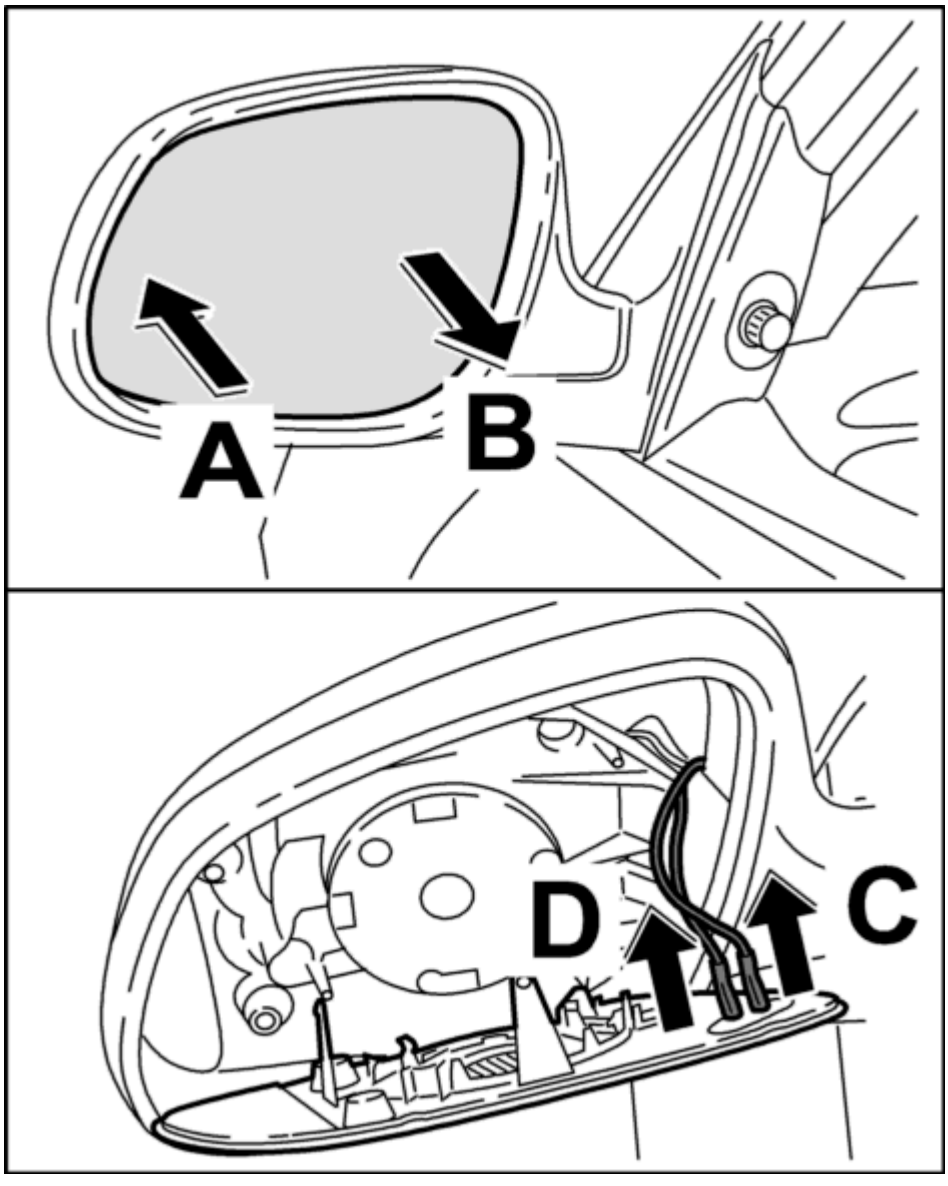

Fig. 291: Removing mirror glass (2 Of 2)
Courtesy of PORSCHE OF NORTH AMERICA, INC.

2. Remove negative cable **-C-** and positive cable **-D-** from the heating foil. See **Fig. 291**.

INSTALLING MIRROR GLASS

Installing mirror glass

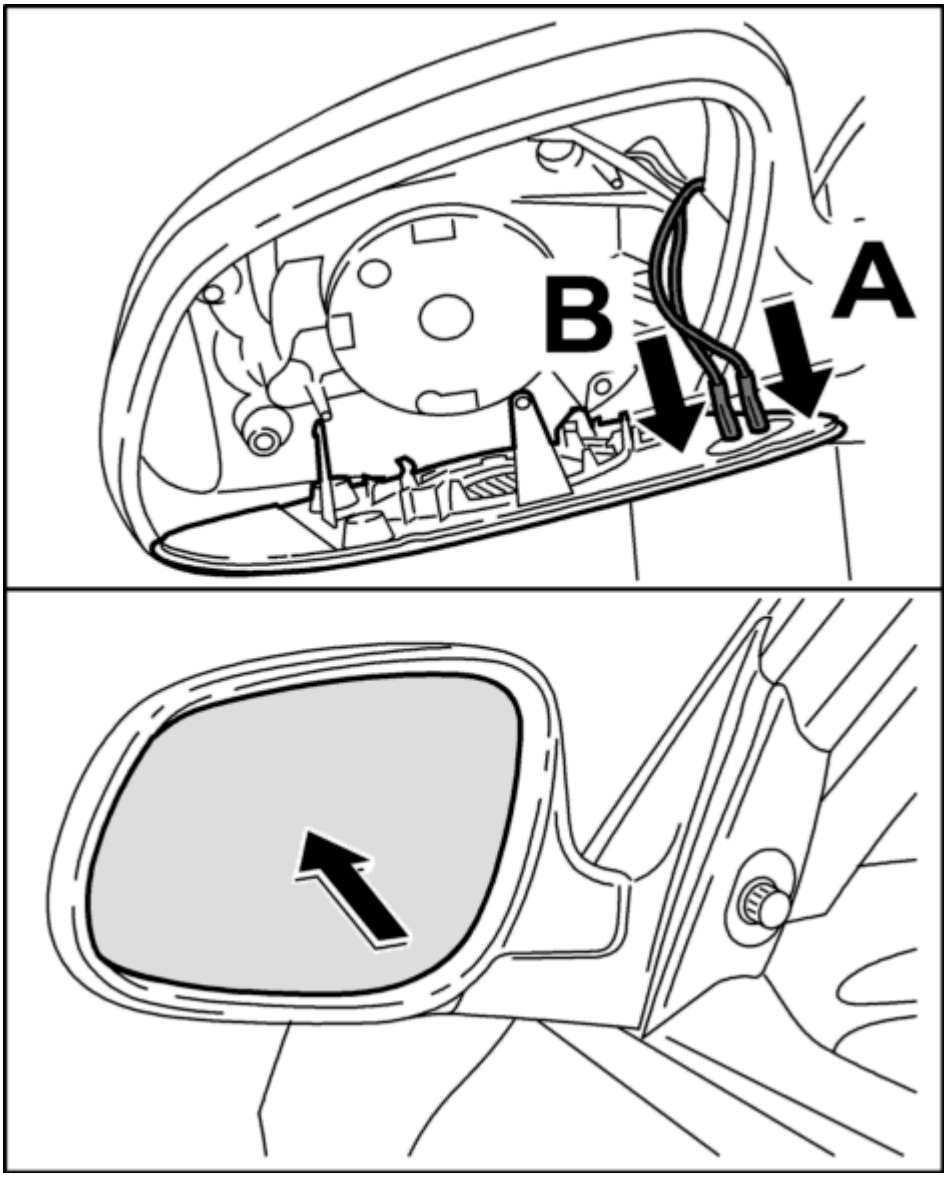

Fig. 292: Installing mirror glass (1 Of 2)
Courtesy of PORSCHE OF NORTH AMERICA, INC.

1. Connect negative **-A-** and positive cable **-B-** to the heating foil. See **Fig. 292**.

2. Insert glass for mirror .

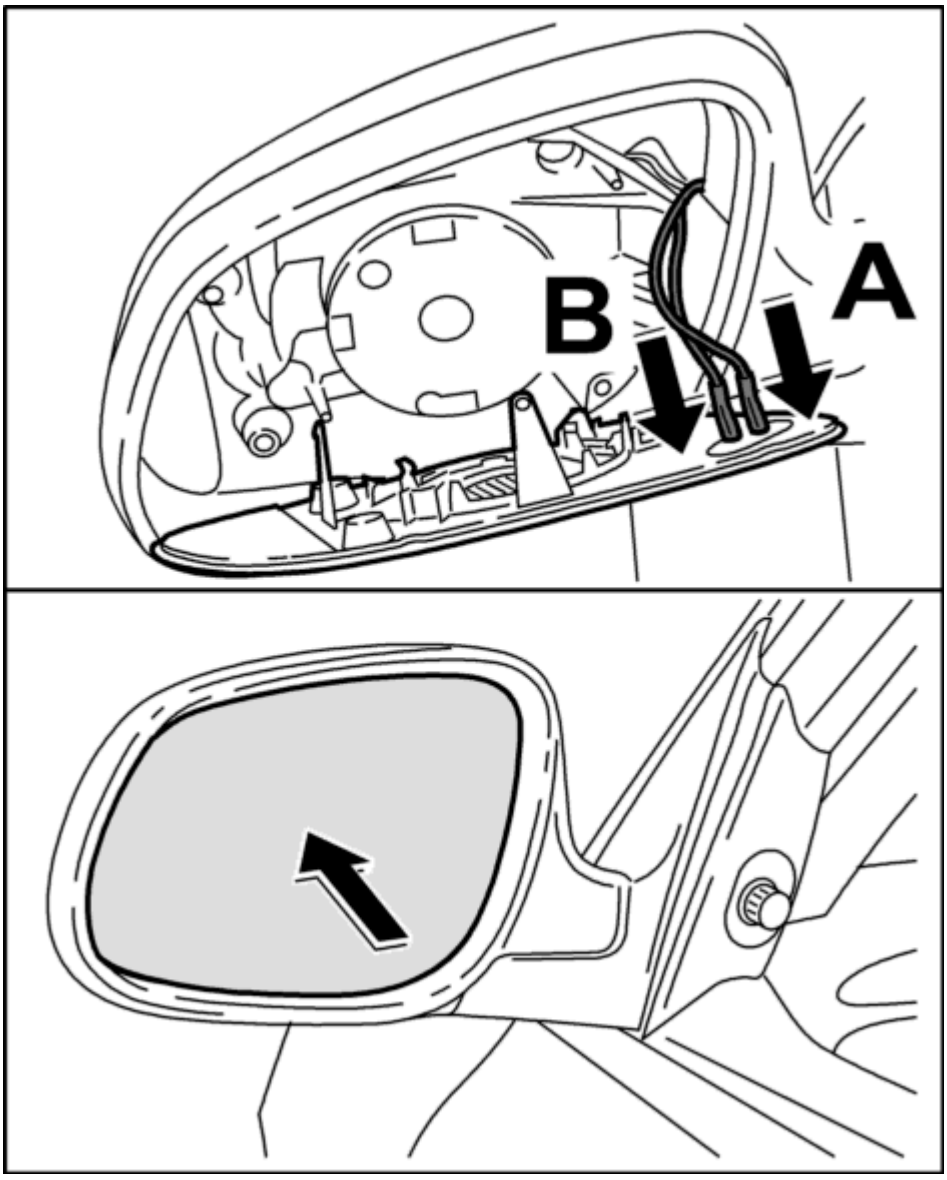

Fig. 293: Installing mirror glass (2 Of 2)
Courtesy of PORSCHE OF NORTH AMERICA, INC.

3. Press center of glass **-arrow-** into the mirror until the glass engages firmly in the adjustment mechanism. See **Fig. 293**.

66 79 19 REMOVING AND INSTALLING HOUSING FOR REAR-VIEW MIRROR - AS OF MY 2003 (ALL MODELS)

PRELIMINARY WORK

Preliminary work

1. Remove mirror glass. **--> 667819 Removing and installing mirror glass - "removing"**